




# HEXAGON NUT - METRIC COARSE

**ROCKSIDE**  
EXPORT LIMITED

- Standard Specification** : BS 3692  
 Also conforms to ISO 4032, DIN 934
- Material** : Medium Carbon Steel
- Material Properties** : Cl 8, 10
- Threads** : Conforms to Class 6H of ISO 965/2  
 for coarse series.
- Surface Finish** : Black, Electro Galvanized,  
 Hot Dipped Galvanized.

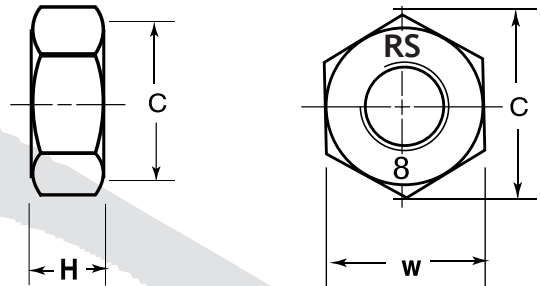

## DIMENSIONS

THREAD SIZE	Pitch	W		C		H	
		Max	Min	Max	Min	Max	Min
M4	0.7	7.00	6.85	8.10	7.74	3.20	2.90
M5	0.8	8.00	7.85	9.20	8.87	4.00	3.70
M6	1.0	10.00	9.78	11.50	11.05	5.00	4.70
M8	1.25	13.00	12.73	15.00	14.38	6.50	6.14
M10	1.5	17.00	16.73	19.60	18.9	8.00	7.64
M12	1.75	19.00	18.67	21.90	21.1	10.00	9.64
M14	2.0	22.00	21.67	25.40	24.49	11.00	10.57
M16	2.0	24.00	23.67	27.70	26.75	13.00	12.57
M18	2.5	27.00	26.67	31.20	30.14	15.00	14.57
M20	2.5	30.00	29.67	34.60	33.53	16.00	15.57
M22	2.5	32.00	31.61	36.90	35.72	18.00	17.57
M24	3.0	36.00	35.38	41.60	39.98	19.00	18.48
M27	3.0	41.00	40.38	47.30	45.63	22.00	21.48
M30	3.5	46.00	45.38	53.10	51.28	24.00	23.48
M33	3.5	50.00	49.38	57.70	55.8	26.00	25.48
M36	4.0	55.00	54.26	63.50	61.31	29.00	28.48
M39	4.0	60.00	59.26	69.30	66.96	31.00	30.38
M42	4.5	65.00	64.26	75.10	72.61	34.00	33.38
M45	4.5	70.00	69.26	80.80	78.26	36.00	35.38
M48	5.0	75.00	74.26	86.60	83.91	38.00	37.38
M52	5.0	80.00	79.26	92.40	89.56	42.00	41.38
M56	5.5	85.00	84.13	98.10	95.07	45.00	44.38
M60	5.5	90.00	89.13	103.90	100.72	48.00	47.38
M64	6.0	95.00	94.13	109.70	106.370	51.00	50.26